



RM3253 Application Information

--5V_700mA($\pm 3\%$)

陕西亚成微电子有限责任公司
技术支持部
2010.10

OUTLINE



1. RM3253 Introduction
2. Electrical Characteristic Description
3. Application Circuit
4. BOM List
5. Transformer Parameter
6. Test Report



REACTOR
Microelectronics

一、RM3253 Description

The RM3253 switch Intergard Circuit cost effectively replace all power supplies, and up to 5W output power based on unregulated isolated linear transformer (50/60HZ). Unlike conventional PWM (pulse width modulation) controllers, they regulate the output voltage in a new method of off-time modulation control. The controller consists of a VCO (voltage control oscillator), Sense and logic circuit, VDD pin, under-voltage lockout circuit, protection for over-voltage, current limited circuit, leading edge blanking, over load protection and fault condition auto-restart. They are ideal low power AC/DC adapter/charger solution for portable devices, otherwise, its Built-in 800V high voltage BJT and minimal external componets.

Pin Connection (Top View)



Package	Function	Description
<p>SOP-8</p>	PIN 1: VDD	Power Supply
	PIN 2: NC	Not Connected
	PIN 3: Sense	Current sensor, it senses the voltage via a sensed resistor
	PIN 4: OE	Emmitter Pin of the power BJT switch.
	PIN 5、 6: OC	Output Pin(Connect to switching transformer)
	PIN 7、 8: GND	Ground



REACTOR
Microelectronics



二、Electronical characteristic Description

Item	Conditions	MIN.	TYP.	MAX.	Unit
Supply Voltage					
Operation Voltage			21		V
Turn-on Threshold Voltage	VDD ON	11	12	13	V
Turn-off Threshold Voltage	VDD OFF	5.5	6	6.5	V
Over-voltage Thershold	Vovp		28	30	V
Oscillator					
Operation Frequency		45	50	55	KHZ
Current Sensing					
Leading Edge Blanking		250	300	350	nS
Current Sense Detection Voltage	VDD=15V	0.45	0.5	0.55	V

PCB



REACTOR
Microelectronics

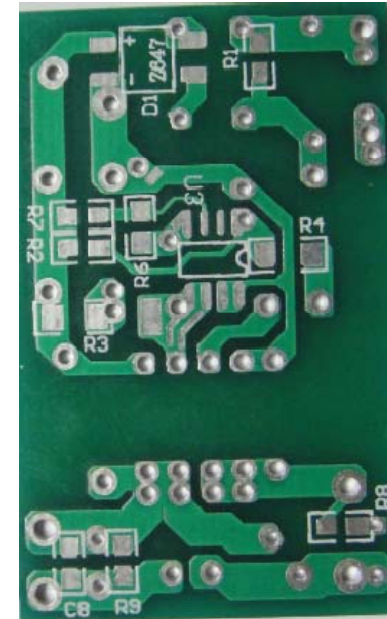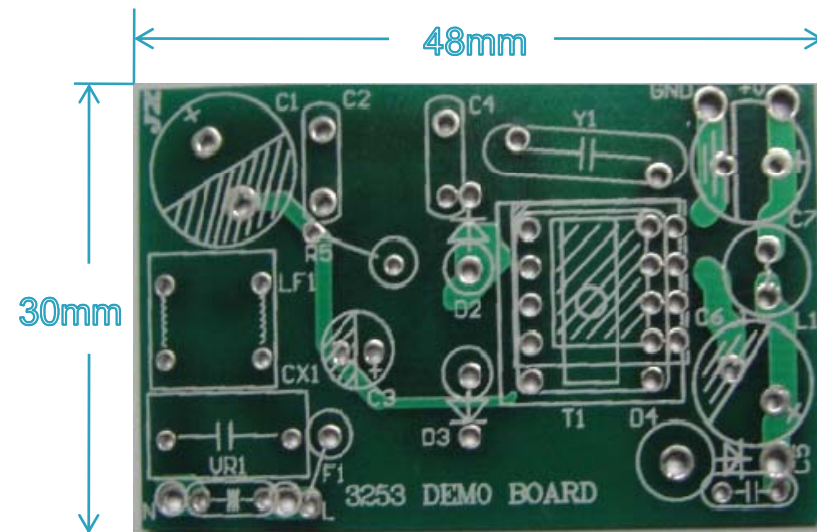

四、BOM LIST


P/N	Description	NO.	Package	Supplier
CX1	0.1uF_275V	1	DIP	
C1	10uF_400V	1	DIP	
C3	1uF_50V	1	DIP	
C4、C5	1nF_1KV	2	DIP	
C6、C7	1000uF_10V	2	DIP	
R2	3M_5%_0805	1	SMD	
R3	100K_5%_0805	1	SMD	
R4	10R_5%_0805	1	SMD	
R5	1.25R_1%_1/2W	1	DIP	
R6	3.0K_5%_0805	1	SMD	
R7	7.5M_5%_0805	1	SMD	
R8	15R_5%_0805	1	SMD	
R9	270R_5%_0805	1	SMD	
D1	Z647	1	SMD	
D2、D3	FR107	2	DIP	
D4	SR360	1	DIP	
LF1	色环电感1mH	2	DIP	
L1	22uH_2A	1	DIP	
F1	1A_250V	1	DIP	
T1	transformer	1	DIP	
U1	RM3253	1	SMD	reactor

五、Transformer



陕西亚成微电子有限责任公司

RM3253 5V_700mA变压器参数

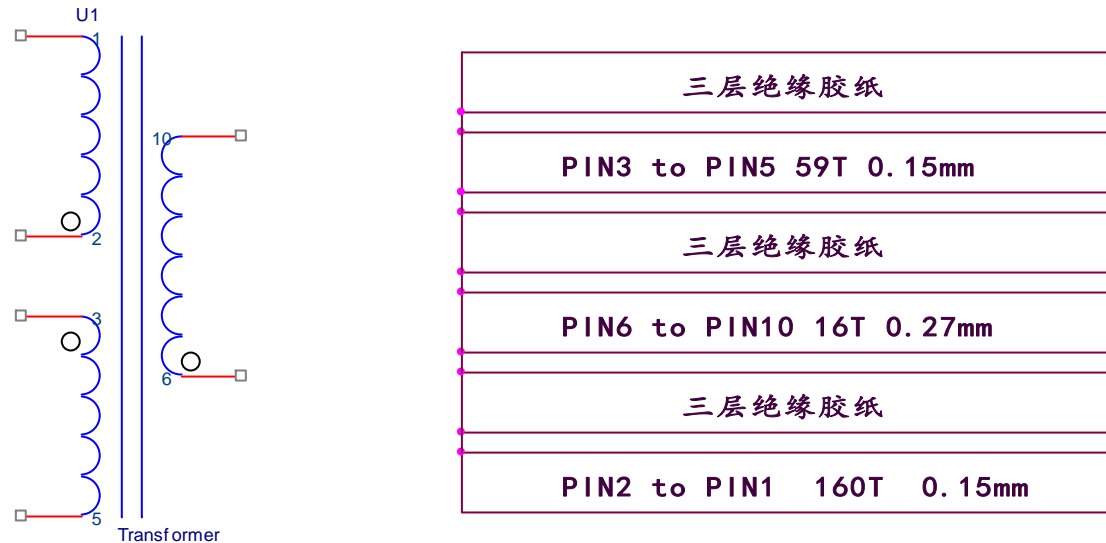

Core: PC40EE13; Lm=3mH -/+5%;

六、 Test Report-Test Condition and Test SPEC.

Description	MIN	TPY	MAX	Test Data	Result
Input					
Voltage Frequency	90V 50hz		265V 60hz	85V-265V	PASS
Output					
Voltage Current Load regulation Power	4.85V 700mA -3%	5V 3.5W	5.15V 3%	 1% 3.4W	PASS PASS PASS PASS
Efficiency					
Energy Star(5)				70.88%(avg.)	PASS

Test Data

Line Regulation

Test Condition: Vin=110V-265V, Iload=1/2Iout(max)

Vin(V)	110	145	190	235	265
Vout(V)	4.92	4.89	4.89	4.89	4.91

Line regulation: 0.6%; LG(SPEC.): ±1% Result: **PASS**;

Test Condition: Vin=110V-265V, Iload=Iout(max)

Vin(V)	110	145	190	235	265
Vout(V)	4.92	4.89	4.88	4.88	4.89

Line regulation: 0.8%; Vout(MAX): ±1%; Result: **PASS**;


OCP

Vin(V)	85V	110V	230V	265V
OCP(A)	1.23	1.3	1.15	1.09
Result	PASS	PASS	PASS	PASS



Test Date



Efficiency

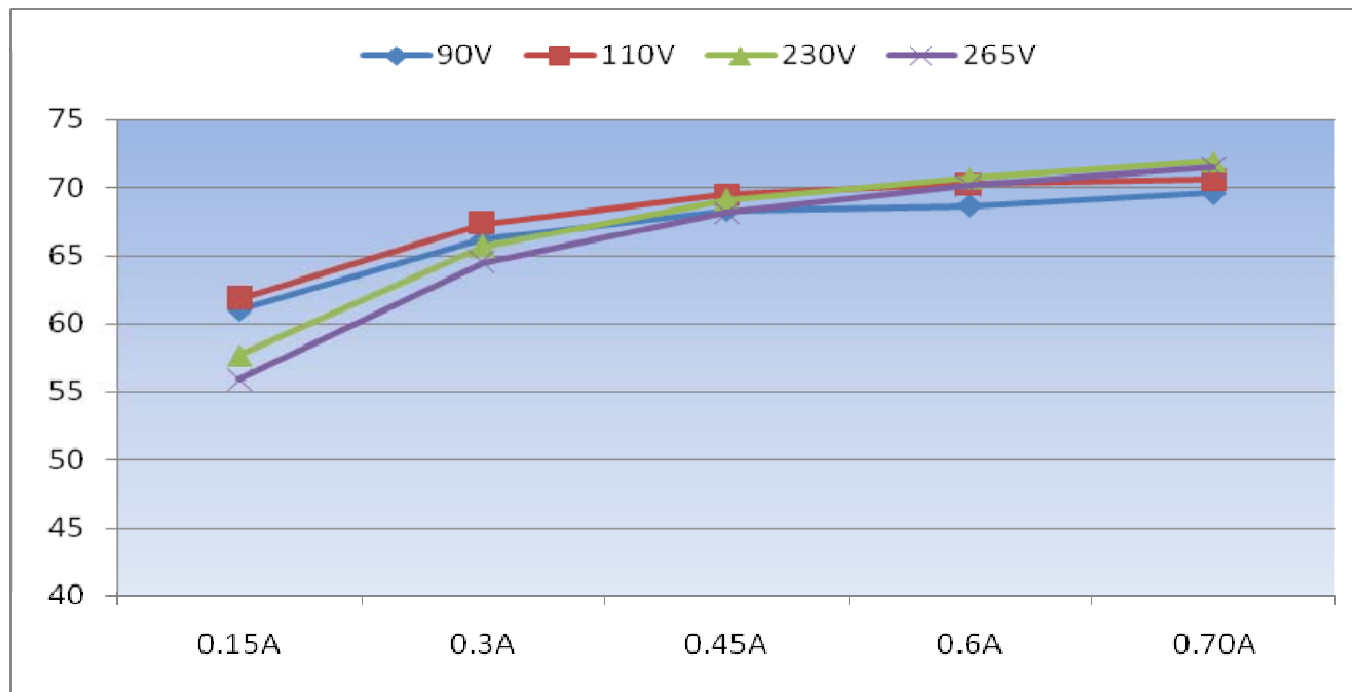

Demo Photo

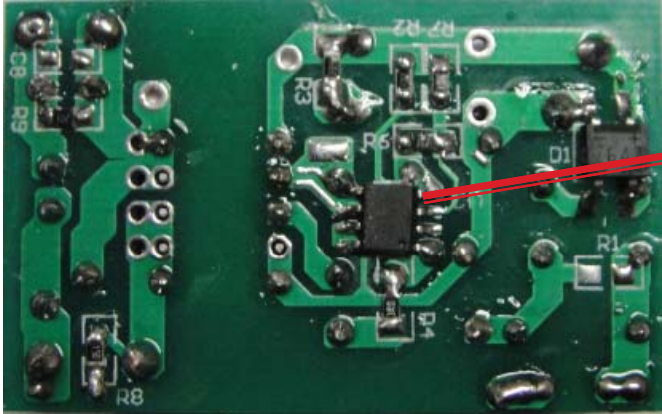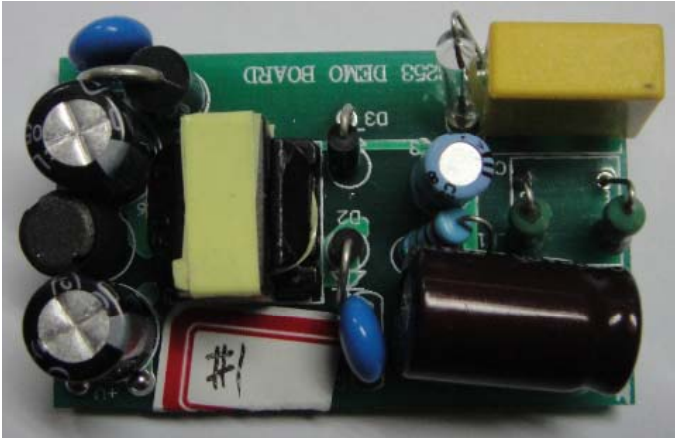

RM3253



REACTOR
Microelectronics

THE END